1. Application


- Automotive DC-DC



2. Features

- Hi-Pot:600VAC
- Basic insulation comply with IEC 60664
- RoHS&Reach Compliant
- Operating Temperature Range

4. Schematic

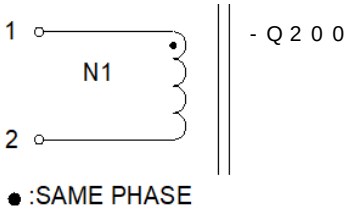

5 Dimension

Part N	Outpu power W)	Inductance(uH) 100KHz,1V	Turns R 20KHz,1	DCR (m MAX)		HI-POT 1mA/3S
4416050-	106963 00	1~2	1~2	1~21~2	/	/COIL-CORE
		1.6	1.4	/	0.28	600 VAC